

MULTI SCREEN®

MS 5200-R



May, 18th 2026

up to 150 m³/h

screening capacity



Environmentally friendly



Double trommel technology



Interchangeable wire screen



Tested safety system

Tracked chassis

The allrounder with high flexibility

Trommel length
5,200 mm

Hopper
Volume 5.5 m³
Loading width 3,650 mm

Weight
max. 20,000 kg

Trommel diameter
2,000 mm

Total screening area
approx. 47 m²

Drive
diesel-hydraulic,
electric, hybrid

Transport measurements
(LxWxH)
10,150 x 2,550 x 4,000 mm



Nobelstr. 11
03238 Massen-Niederlausitz

+49 3531 7906-0
info@zemmler.de

www.zemmler.de/en



Technical Description

- ✓ **Base frame**
 - Longitudinal beam:** double T-profile steel, height approx. 300 mm
 - Chassis:** Tracks
- ✓ **Hopper**
 - Volume:** 5.5 m³
 - Loading height:** 3,100 mm
 - Loading width:** 3,650 mm
- ✓ **Feeding belt**
 - Belt width:** 1,000 mm
 - Belt length:** 3,600 mm
 - Belt type:** plain belt (profile belt: optional)
 - Speed:** adjustable
- ✓ **Double trommel**
 - Screening surface:**
 - Inner:** 24.5 m²
 - Outer:** 22.1 m²
 - Trommel diameter:** 1,500 mm (inner)
 - Trommel diameter:** 2,000 mm (outer)
 - Length:** 5,200 mm
 - Trommel drive:** direct drive by chain and chain wheel
- ✓ **Mesh sizes**
 - Inner:** 80 x 170 mm (standard)
 - Outer:** exchangeable wire screens 2 - 80 mm
 - Screen change function by means of remote control
- ✓ **Cleaning brush**
 - Diameter:** 500 mm with own drive
- ✓ **Conveyor belt fine fraction**
 - Belt width:** 650 mm, hydraulic foldable
 - Discharge side:** direction of travel left
 - Discharge height:** approx. 3,300 mm
- ✓ **Conveyor belt middle fraction**
 - Belt width:** 650 mm, hydraulic foldable
 - Discharge side:** direction of travel right
 - Discharge height:** approx. 3,300 mm
- ✓ **Conveyor belt coarse fraction**
 - Belt width:** 800 mm, hydraulic foldable
 - Discharge side:** rear
 - Discharge height:** approx. 2,900 mm
- ✓ **Trommel belt (fine fraction)**
 - Belt width:** 1,100 mm
- ✓ **3 fractions**
 - Fine fraction:** 2 - 80 mm, on demand
 - Middle fraction:** 2 - 80 mm up to 170 mm
 - Coarse fraction:** ex 170 mm (standard)
- ✓ **Drive concept diesel-hydraulic**
 - Diesel engine:** CATERPILLAR C3.6 74,5 kW 2,400 U/m.
 - Emission std.:** EU stage V / EPA / CARB Tier 4 Final
 - Drive:** hydraulic pumps & hydraulic motors
 - Tank capacity:** 200 l / 20 l AdBlue
- ✓ **Drive concept diesel-electric**
 - Emission std.:** EC-NRMM Stage III A
 - Drive:** Current synchron generator & electric motors
 - Tank capacity:** 200 l
 - external power supply possible (depending on country specific current / in combination with dieselelectric or electric drive)
- ✓ **Electric power supply**
 - Connected load:** approx. 50 kVA
- ✓ **Transport dimensions**
 - Length:** 10,150 mm
 - Width:** 2,550 mm
 - Height:** 4,000 mm
- ✓ **Working dimensions**
 - Length:** 13,050 mm
 - Width:** 10,890 mm
 - Height:** 4,000 mm
- ✓ **Screening capacity**
 - 20 - 150 m³/h**, depending on application,, mesh size and feeding
- ✓ **Weight**
 - Max. 20,000 kg
- ✓ **Colour / Coatings**
 - Polyurethane one-coat topcoat
 - Engine cover and side covers:** RAL 6001 green
 - Hopper, chassis, screening trommel:** RAL 7022 grey
 - Conveyor belt frame:** hot-dip galvanized

Tracked chassis

Transport & Working position

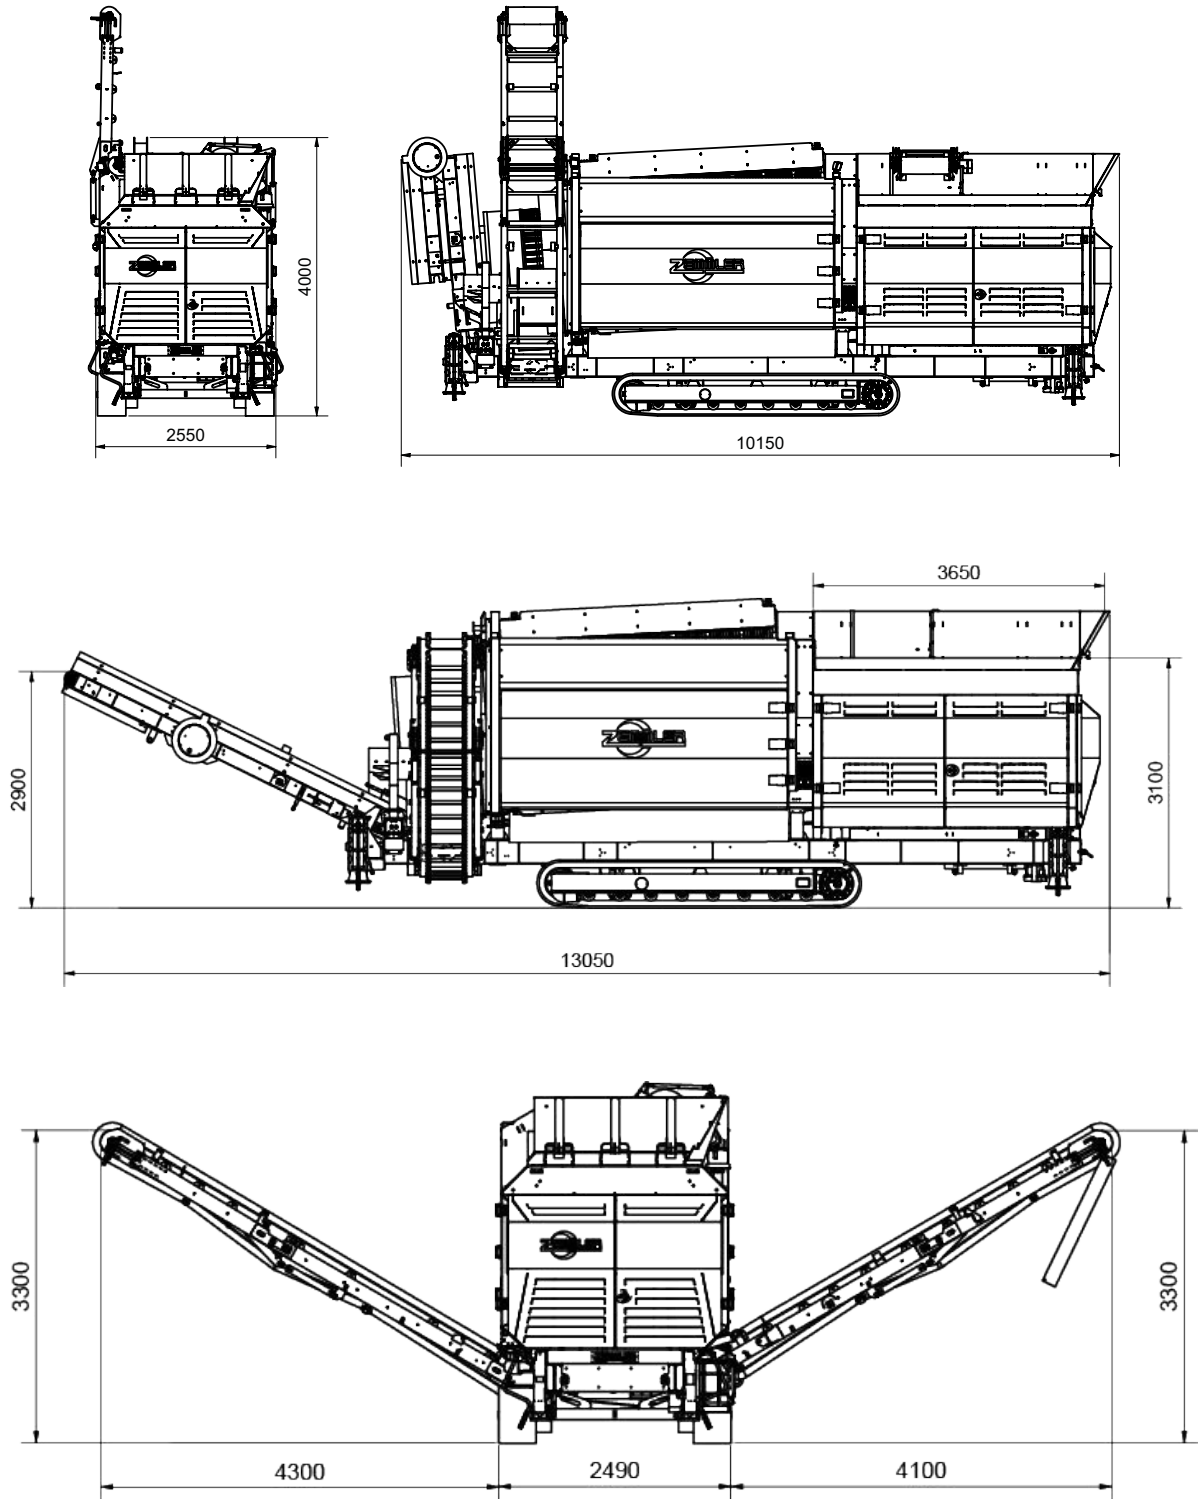


Illustration may contain extra charge options. All details are subject to technical modifications and future developments. Further distribution and any kind of publication is permitted only with written approval of the Zemmler Siebanlagen GmbH.